



100 0 100
SCALE IN FEET

EXISTING GRAVEL PARKING AREA

ASPEN COVE LODGE

BENCH MARK - REBAR
ELEV = 1052.58

6" GRAVEL PLACED IN WALK AREAS

EXISTING PAVED ROAD

DOCK ACCESS

BANK STABILIZATION
ALONG NEW SLOPE
AREAS WITH 8"-24" DIA.
ROCK


REMOVED SEDIMENT FROM
EXISTING CHANNEL AND
MARINA AREA

APPROX HIGH WATER
LINE EL = ±1026.0

FILL AREA FROM
DREDGING CHANNEL

NOTES:

1. APPROX. 17,800 CU YDS. OF DREDGING MATERIAL WAS EXCAVATED & PLACED ALONG SIDE AS SHOWN.
2. DREDGING WAS DONE WITHIN EXISTING CHANNEL AND MARINA.
3. APPROX. 11,500 S.F. OF ROCK WAS IMPORTED AND PLACED FOR BANK STABILIZATION AS SHOWN.
4. APPROX. 14,000 S.F. OF GRANULAR FILL WAS IMPORTED AND PLACED ON WALK AND DRIVE WAYS.

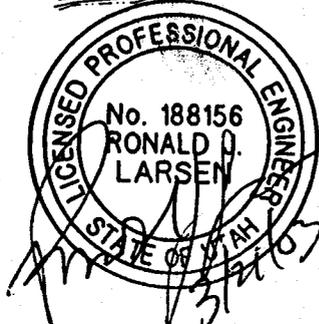

PREPARED BY: INSITE ENGINEERING
1957 W. ROYAL HUNT DR. SUITE #275
CEDAR CITY, UT 84720 (435) 867-4565


PURPOSE: DREDGE EXISTING CHANNEL
AND MARINA TO IMPROVE ACCESS
TO LAKE
PROPOSED MAINTENANCE FOR ASPEN
COVE BOAT DOCK
AT: PANGUITCH LAKE
COUNTY OF: GARFIELD
STATE: UTAH
APPLICATION BY: JOHN BOSCHETTO

**ASPEN COVE RESORT
DOCK PLAN VIEW**


SCALE = 1" = 200'

JOHN BOSCHETTO
225 NORTH SHORE RD.
PANGUITCH LAKE, UT 84759

DATE: 3-20-03
SHEET 1 OF 2

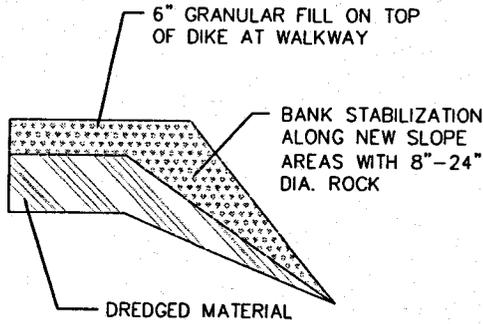


TYP. CROSS SECTION C-C
NTS

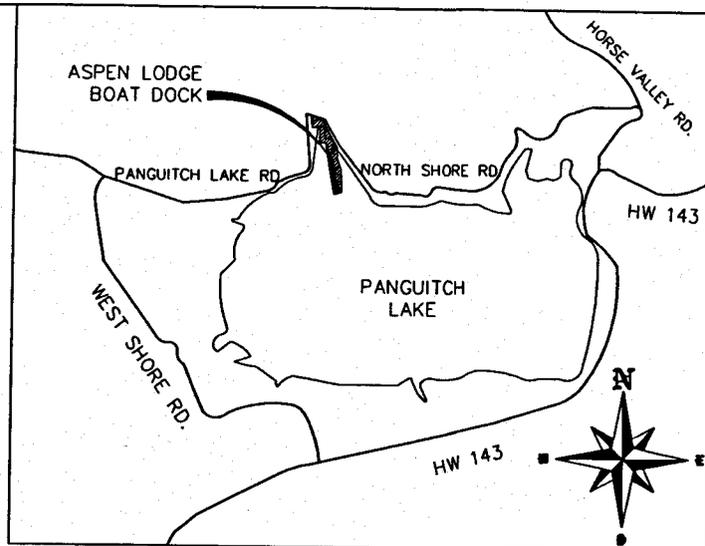


VICINITY MAP


SCALE = 1" = 5000'
FROM USGS MAP
LATITUDE: 37°43.48'
LONGITUDE: 112°38.94'

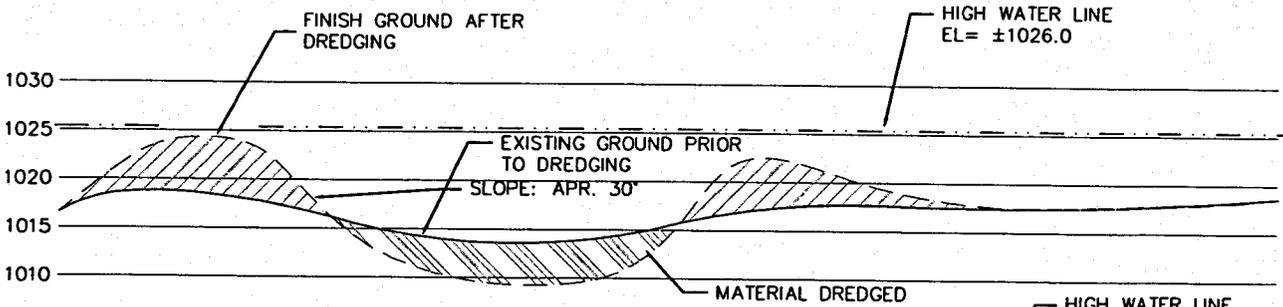

SECTION A-A
SCALE = 1" = 40'

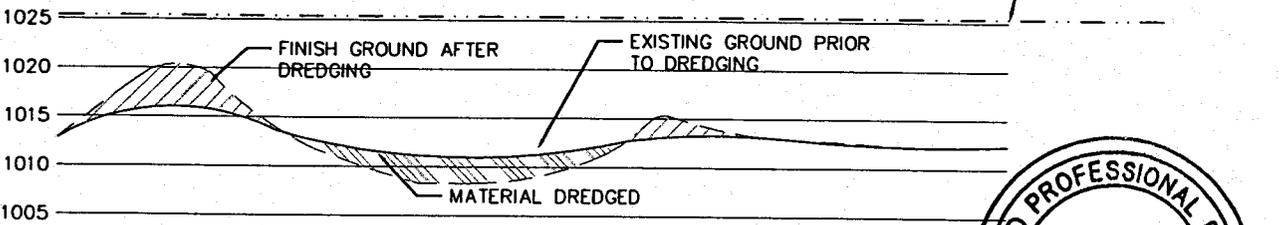

SECTION B-B
SCALE = 1" = 40'

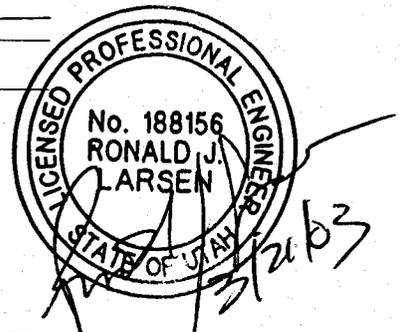

PREPARED BY: INSITE ENGINEERING
1957 W. ROYAL HUNT DR. SUITE #275
CEDAR CITY, UT 84720 (435) 867-4565

PURPOSE: DREDGE EXISTING CHANNEL AND MARINA TO IMPROVE ACCESS TO LAKE

SECTION VIEWS

JOHN BOSCHETTO
225 NORTH SHORE RD.
PANGUITCH LAKE, UT 84759

PROPOSED MAINTENANCE FOR ASPEN COVE BOAT DOCK
AT: PANGUITCH LAKE
COUNTY OF: GARFIELD
STATE: UTAH
APPLICATION BY: JOHN BOSCHETTO

DATE: 3-20-03
SHEET 2 OF 2